



## 2112 Cellular Option

The model 2112 video entry system requires an internet connection to operate. This can be by a direct hard wired connection (Ethernet cable) or a wireless connection (wireless access point) from the homeowner's router to the 2112 (homeowner supplies required hardware). If it is not possible to make an Ethernet connection from the homeowner's router to the 2112, optional cellular kits are available to provide the required internet connection. There are four cellular kit options available (cellular connections will incur additional monthly cellular service fees):

- **T-Mobile Internal Cellular Kit** (P/N 2112-150)  
Use with 2112-080 Surface Mount Systems
- **AT&T Internal Cellular Kit<sup>1</sup>** (P/N 2112-151)  
Use with 2112-080 Surface Mount Systems
- **T-Mobile External Cellular Kit** (P/N 2112-152)  
Use with 2112-087 Flush Mount Systems
- **AT&T External Cellular Kit<sup>1</sup>** (P/N 2112-153)  
Use with 2112-087 Flush Mount Systems

Note 1: AT&T cellular service requires Minimum Build 32 for the 2112 firmware. To check, login to your 2112 online account and click System Event Log – type “build” in the search bar. This will show the build number for your system.

## Cellular Activation

Before you can activate the cellular device, be sure the 2112 system has been added to your account. If you do not have a 2112 account, you need to create one and add the 2112 system to this account before you can proceed with activating the cellular device. To login to your current account, or to REGISTER a new account, click the link below.

<https://dks2112.com>

A screenshot of the DKS Access Control login page. The page features the DKS DoorKing logo at the top left. Below the logo, the text 'DKS Access' is displayed in a large, white font on a dark blue background. Underneath, a white box contains the text 'Welcome to DKS DoorKing Access Control.' followed by 'Please Log In or Register a new account.' There are two input fields for 'Username' and 'Password'. Below these fields is a checkbox labeled 'Remember me (for 30 days)'. At the bottom of the form are three buttons: 'LOG IN' (blue), 'REGISTER' (dark grey), and 'LOST PASSWORD' (dark grey).

After logging into your account, select Manage Systems.

The screenshot shows the DKS DOORKING user interface. At the top, there is a navigation bar with links for HOME, SYSTEMS, BILLING, ABOUT, and 2112 EVOLVE, along with a WELCOME message. Below the navigation bar is a header section with the text 'DKS Access'. Underneath, there is a 'Welcome back' message and a section titled 'Available Actions.' containing four buttons: 'Manage Systems' (circled in red), 'Manage Billing', 'View System Event Log', and 'View User Log'.

Locate the system that you need to activate the cell kit for. Click ETHERNET under the SERVICE column. This will open the System ID page.

The screenshot shows the 'Entry Systems' page. At the top, there is a navigation bar with links for HOME, SYSTEMS, BILLING, ABOUT, and 2112 EVOLVE, along with a WELCOME message. Below the navigation bar is a header section with the text 'Entry Systems'. Underneath, there are three buttons: 'GO BACK', 'ADD A SYSTEM', and 'BILLING'. Below the buttons, there is a 'Show 10 entries' dropdown and a search box. A table lists system entries with columns: ID, BoardID, Created, Name, Service, Settings, Residents, Phones, Door Control, Volume Control, Hold Open, and Remove. The first entry (ID 11) is highlighted with a red box. The 'Service' column for this entry is 'Ethernet'.

| ID | BoardID | Created        | Name          | Service  | Settings | Residents | Phones | Door Control | Volume Control | Hold Open | Remove |
|----|---------|----------------|---------------|----------|----------|-----------|--------|--------------|----------------|-----------|--------|
| 11 | 86E521  | 20-09-10 05:40 | Yocto Firm 63 | Ethernet | Edit     | Edit (1)  | Phones | Door         | Volume         | Schedule  | Remove |

Click CHANGE SIM

The screenshot shows the 'System ID 11' page. At the top, there is a navigation bar with links for HOME, SYSTEMS, BILLING, ABOUT, and 2112 EVOLVE, along with a WELCOME message. Below the navigation bar is a header section with the text 'System ID 11'. Underneath, there is a 'GO BACK' button and the name 'Rick Yocto Firm 63'. Below the name, there are three columns of information: 'Provider: None', 'Cellular Data Connection: Service is Unavailable', and 'Outgoing Phone Calls: Service is Active'. At the bottom, there are three buttons: 'CHANGE SIM' (circled in red), 'UNAVAILABLE', and 'DEACTIVATE'.

Enter the five (5) digit SIM ID found on the cellular dongle and click CHANGE.

DKS DOORKING HOME SYSTEMS BILLING ABOUT 2112 EVOLVE WELCOME

## System ID 11


← GO BACK Name: Yocto Firm 63

Provider: **None**  
Change **None** to:

Cellular Data Connection Service is **Unavailable**  
UNAVAILABLE

Outgoing Phone Calls Service is **Active**  
DEACTIVATE

CHANGE REMOVE CANCEL

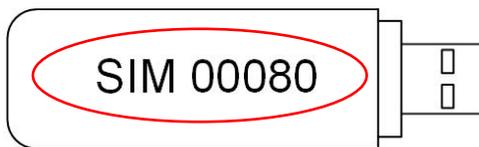

The system will now show the SIM ID with T-Mobile or AT&T as the service provider. Be sure the Cellular Data Connection Service and Outgoing Phone Calls Service show ACTIVE. If not, click the ACTIVE tab.

DKS DOORKING HOME SYSTEMS BILLING ABOUT 2112 EVOLVE WELCOME

## System ID 11

System has been updated OK: success :  
Your request has been acknowledged x

← GO BACK Name: Yocto Firm 63

Provider: **T-Mobile-Kore**  
SIM ID: **00080**  
CHANGE SIM

Cellular Data Connection Service is **Active**  
DEACTIVATE

Outgoing Phone Calls Service is **Active**  
DEACTIVATE

**NOTE:** After the cellular service is activated, the 2112 will need to be powered down and then powered back on. It may take up to five (5) minutes for the 2112 to login in to the cellular service and activate.