




# 1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

BEST SUITED FOR APPLICATIONS REQUIRING CONTROL OF A SINGLE DOOR OR GATE AND IN APPLICATIONS WHERE CARD READERS OR OTHER EXPANSION OPTIONS ARE NOT REQUIRED

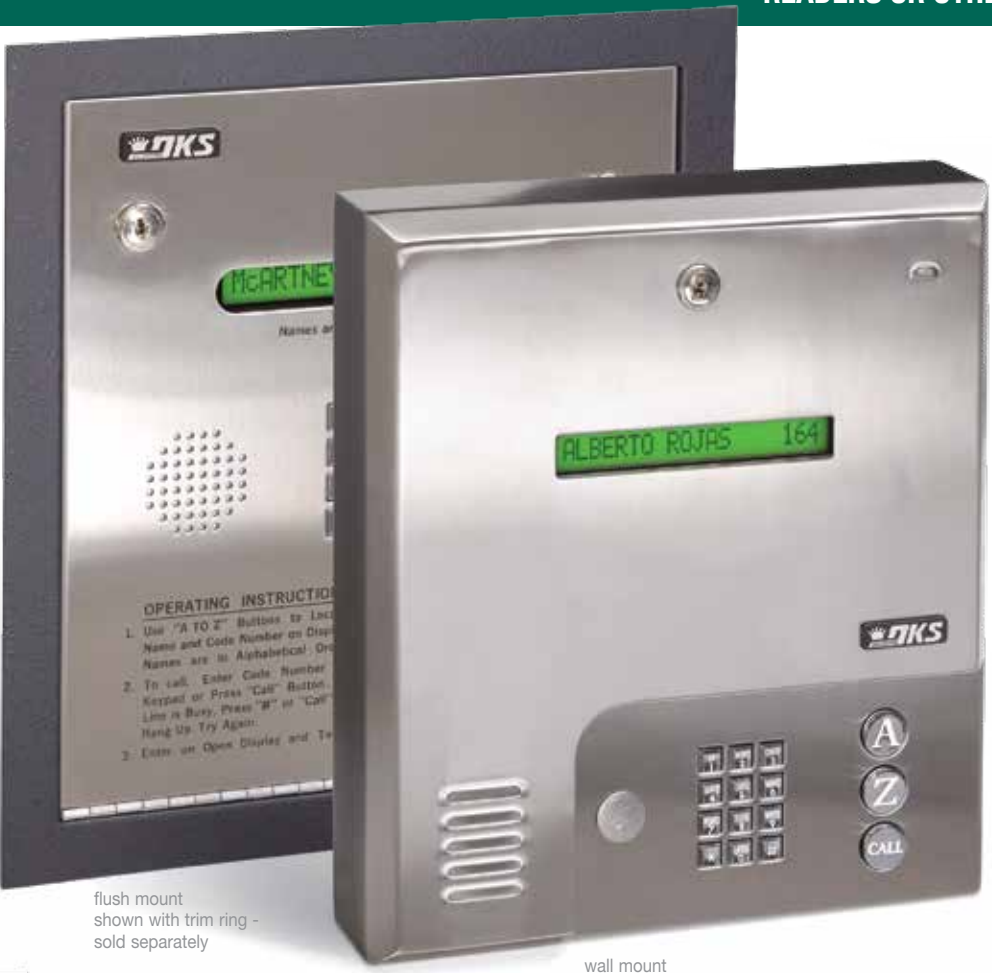

flush mount shown with trim ring - sold separately

wall mount

- Provides both resident and visitor access control into apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, VoIP, Wireless, or copper POTS lines
- 2 year limited factory warranty



**stainless steel** plate and anti-vandal features protects all internal parts



**big characters** half inch LCD display




**pc programmable** easy to use software included



**voice and remote programming** use almost any phone service and retrofit to older DKS units

# 1834 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

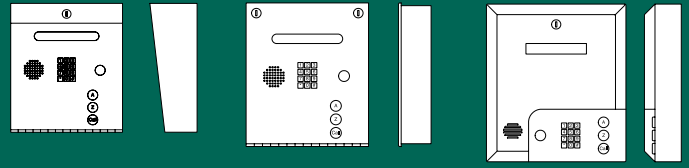

**1834 Surface**  
11.25" W x 13" H x 4.75" D  
(285mm W x 330mm H x 120.6mm D)

**1834 Flush**  
12" W x 13.25" H x 3.25" D  
(305mm W x 336.5mm H x 82.5mm D)

**1834 Wall**  
13.25" W x 15" H x 3.5" D  
(336.5mm W x 381mm H x 88.9mm D)

| 1834                 | PHONE # MEMORY | ENTRY CODES    | DEVICE CODES | DOOR CONTROL | DIRECTORY               | ELEVATOR CONTROL | PROGRAMMING                               | OPTIONS               | TRANSACTION BUFFER |
|----------------------|----------------|----------------|--------------|--------------|-------------------------|------------------|---|-----------------------|--------------------|
| <b>Surface Mount</b> | 3000           | 1000 (4-digit) | 0            | 2 Doors      | Single Line LCD Display | No               | PC with * Remote Account Manager Software |                       | 8000 Events        |
| <b>Flush Mount</b>   | 3000           | 1000 (4-digit) | 0            | 2 Doors      | Single Line LCD Display | No               | PC with * Remote Account Manager Software | Gold Plated Faceplate | 8000 Events        |
| <b>Wall Mount</b>    | 3000           | 1000 (4-digit) | 0            | 2 Doors      | Single Line LCD Display | No               | PC with * Remote Account Manager Software |                       | 8000 Events        |

\* Software is included with the DKS system

## Technical Features

### Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface or flush mount only)
- Surface, Flush or Wall mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4x

### Connection Methods

- Cellular (powered by AT&T 4G LTE)
- VoIP (select your own VoIP provider)
- Wireless (Short distances - up to 1000 ft. max)
- POTS (Plain Old Telephone Service)

Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions

### Specifications

- Single line 20 character super-twist LCD display 1/2 inch characters
- 16 VAC (2 power transformers included)
- Full Duplex voice communication
- Stores up to 3000 phone numbers, 255 area codes
- Transaction buffer stores last 8000 events
- Control 2 entry points
- Programmable directory codes (1 to 4 digits)
- 10 & 11 digit dialing capability
- 31 security (permission) levels, 29 programmable with 4 time zones each
- 32 holiday schedules
- Four-digit entry codes
- Built-in clock / calendar
- Hold open time zones (8)
- Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

### Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
- Camera Ready: Optional B&W or Color CCTV camera\* \*may require additional CCTV equipment
- Shipping weight approximately 15-20 Lbs (6.8-9 kg)



FCC (US) DUF6VT-12874-OT-T  
DOC (CAN) 1736 4528 A

AT&T, the AT&T logo and all other AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies



Access Control Solutions since 1948

Distributed by:

### MEMBER:



**DOORKING® INC.**  
120 Glasgow Avenue, Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com  
© 2015 All Rights Reserved. Product specifications may change without notice.  
Rev. 5/15