



1835 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM



BEST SUITED FOR APPLICATIONS REQUIRING COMPLETE ACCESS CONTROL FOR UP TO 24 ENTRY POINTS, INCLUDING ELEVATOR CONTROL



surface mount

wall mount

- Provides both resident and visitor access control into and within apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, Ethernet, or copper POTS lines
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- Resident access control is provided by means of cards, digital PIN codes, or wireless transmitters
- 2 year limited factory warranty



wireless expansion
up to 24 entry points



internal LED
lit keypad and A-Z-CALL buttons




pc programmable
easy to use software included



voice and remote programming
use DKS service options for connection and programming

1835 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

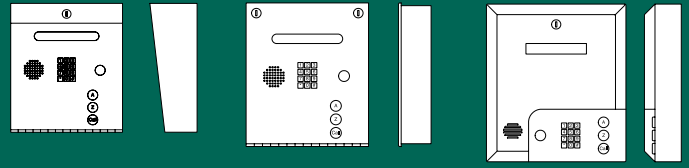

1835 Surface
11.25" W x 13" H x 4.75" D
(285mm W x 330mm H x 120.6mm D)

1835 Flush
12" W x 13.25" H x 3.25" D
(305mm W x 336.5mm H x 82.5mm D)

1835 Wall
13.25" W x 15" H x 3.5" D
(336.5mm W x 381mm H x 88.9mm D)

1835	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	DOOR CONTROL	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING	OPTIONS	TRANSACTION BUFFER
Surface Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events
Flush Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software	Gold Plated Faceplate	8000 Events
Wall Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events

* Expands to 24 with Tracker Expansion Boards (wired or wireless)

** Software is included with the DKS system

Technical Features

Mechanical

- Stainless steel faceplate
- Galvanized steel sub-plate
- Metal keypad, with Internally lit LED keypad and A-Z-CALL buttons
- Offset speaker holes for protection
- Hands free voice operation (Optional handset available on surface or flush mount only)
- Built-in postal lock provision, EEPROM memory
- Surface, Flush or Wall mounting styles
- Flush mount requires flush mounting kit
- Enclosures are rated NEMA 4x

Connection Methods

- Cellular (powered by AT&T 4G LTE)
 - VoIP (select your own VoIP provider)
 - POTS (Plain Old Telephone Service)
- Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions

Specifications

- Single line 20 character super-twist LCD display 1/2 inch characters
- 16 VAC (2 power transformers included)
- Full Duplex voice communication
- Stores up to 3000 phone numbers, 255 area codes
- Max 8000 Weigand device (card codes), 10 facility codes
- Transaction buffer stores last 8000 events
- Control 3 entry points, expandable to 24 with tracker expansion boards
- Programmable directory codes (1 to 4 digits)
- 10 & 11 digit dialing capability
- 31 security (permission) levels, 29 programmable with 4 time zones each
- 32 holiday schedules
- Four-digit entry codes
- Built-in clock / calendar
- Hold open time zones (8)
- Entry code time zones
- True Anti-Pass Back
- Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

Miscellaneous

- Environmental: 10°F to 145°F (-12°C to 62°C)
- Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)
- ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
- Camera Ready: Optional B&W or Color CCTV camera* *may require additional CCTV equipment
- Shipping weight approximately 20-25 Lbs (9-11 kg)



FCC (US) DUF6VT-12874-OT-T
DOC (CAN) 1736 4528 A

AT&T, the AT&T logo and all other AT&T marks contained herein are trademarks of AT&T Intellectual Property and/or AT&T affiliated companies

Distributed by:



Access Control Solutions since 1948

MEMBER:



DOORKING, INC.
120 Glasgow Avenue, Inglewood, California 90301 U.S.A.
Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com
© 2017 All Rights Reserved. Product specifications may change without notice.
Rev. 5/17