




# 2170 VEHICULAR DC SLIDE GATE OPERATOR

## evOLVE THE NEXT GENERATION OF ACCESS CONTROL

Smart, brushless DC swing gate automation  
with battery backup

- 120 / 240 VAC selectable input or 24 VDC
- Brushless DC motor available in 500W (½ HP) or 750W (1 HP) configurations
- Removable cover allows fast, unobstructed access
- Heavy-duty steel frame built for continuous-duty operation
- Moves gates up to 40 ft or 3,500 lbs
- Integrated battery backup with two (2) 7Ah batteries
- 5-year limited warranty
- Five (5) programmable relays
- Six (6) programmable UL inputs
- Built-in Diagnostics

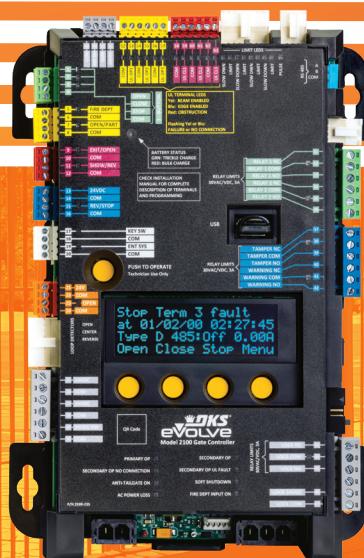

eVOLVE™ Smart Controller

Built-in smart controls with  
Digital Onboard Operator  
Controls and Programming  
Access Controller via RS485 .  
USB configuration backup, event  
logging, and diagnostics.

Residential • Commercial • Industrial



Easy Onboard  
Programming

Intuitive onboard LCD interface  
allows fast setup, adjustment,  
and diagnostics directly  
at the operator—no external  
devices required.



BRUSHLESS  
MOTOR

Powerful Brushless  
DC Motors

Up to 1,800 lb swing gate capacity  
for demanding residential and  
commercial applications.




Built from the  
Ground Up

Heavy-duty steel construction  
with a durable semi-gloss  
black powder coat engineered  
for continuous-duty residential  
and commercial applications.

ACCESS CONTROL **SOLUTIONS**

# DoorKing® 2170 VEHICULAR DC SLIDE GATE OPERATOR

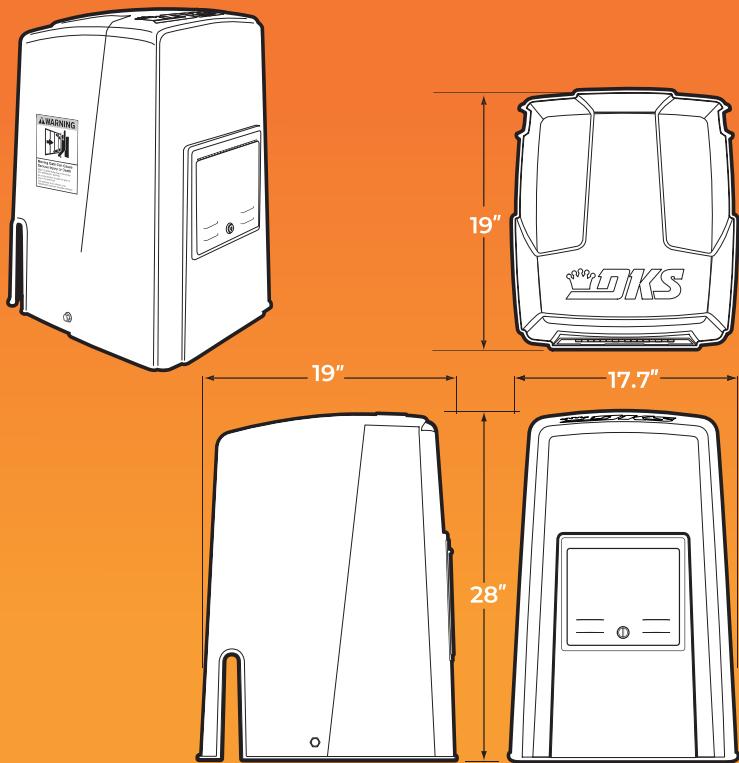

2170-380 / 382

2170-381 / 383

CLASS OF OPERATION	I, II, III, IV	I, II, III, IV
MAX GATE LENGTH	40 ft (12.192 m)	40 ft (12.192m)
MAX GATE WEIGHT	2,300 lb (1043 kg)	3,500 lb (1587 kg)
MOTOR	Motor Brushless 36 VDC <sup>1</sup> 500W (½ HP)	Motor Brushless 36 VDC <sup>1</sup> 750W (1 HP)
INPUT	120 / 240 - 1 <sup>Ø</sup> VAC 5 A / 3 A	120 / 240 - 1 <sup>Ø</sup> VAC 7A / 4A
BATTERY BACKUP	TWO (2) 7AH	TWO (2) 7AH
MAXIMUM CYCLES	40 cycles with 7Ah batteries 150 cycles with 18Ah batteries	40 cycles with 7Ah batteries 150 cycles with 18Ah batteries
DUTY CYCLE	Continuous	Continuous

Note 1: 36 VDC motor is operated at 24 VDC.

## DoorKing® Inc.

Access Control Solutions since 1948



120 S. Glasgow Avenue,  
Inglewood, California 90301 U.S.A.  
Tel: 310-645-0023 FAX: 310-641-1586  
www.doorKing.com

© 2026 All Rights Reserved.  
Product specifications may  
change without notice. Rev. 2/26



## TECHNICAL FEATURES

### MECHANICAL

Class of Operation: I, II, III, IV

Maximum Gate Weight:

- 2170-380 / 382: 2,300 lb
- 2170-381 / 383: 3,500 lb

Maximum Gate Length:

- 2170-380 / 382: 40 ft
- 2170-381 / 383: 40 ft

Pulling Medium: #40 Nickel Chain

Adjustable Speed: 12 in/Sec (max)

Gearbox Reduction: 30:1

Duty Cycle: Continuous

Power Loss Operation: Push Button, Constant Pressure

Manual Release: Internal/Manual

Motor (Brushless 36 VDC<sup>1</sup>):

- 2170-380 / 382: 500W (½ HP)
- 2170-381 / 383: 750W (1 HP)

Input Power VAC: 120 / 240 - 1<sup>Ø</sup>

Amps (120 / 240 VAC):

- 2170-380 / 382: 5A / 3A
- 2170-381 / 383: 7A / 4A

Accessory Device Power: 24 VDC, 3A

Battery Backup: Two (2) 7 Ah batteries

### SMART CONTROLS (EVOLVE™)

- Onboard LCD operator programming USB configuration backup and restore
- Built-in diagnostics and event logging
- Supports plug-in accessory hub modules
- Compatible with DKS access control systems

### MISCELLANEOUS

Environmental:

-10°F to 158°F (-23°C to 70°C)

With optional heater kit: -40°F to 158°F (-40°C to 70°C)

Heater Kit:

Thermostatically controlled heater kit required for operation below freezing temperatures to prevent battery damage. Heater kit is for AC-powered operators only.

Shipping Weight:

Approximately 175-225 lb (79-102 kg), depending on model and options selected.

Safety Requirements:

Operator requires monitored Type B1 and/or Type B2 entrapment protection devices.

DISTRIBUTED BY:



MEMBER:

