

1602 OCTAGON ARM EXTENSION KIT / REVERSE EDGE

DoorKing Part Numbers:

1602-303


Octagon Arm 3-ft Extension Kit

8080-915

15-ft Reverse Edge + Red/Green LED
(Sold Separately)

This kit is designed for a **1602** barrier gate operator **ONLY**. It **CANNOT** be used with 1601 barrier **OR** 1603 auto-spikes barrier operators. It will extend a 14 ft octagonal arm an **extra three feet**. The reverse edge is sold separately but **highly recommended** for safety when lowering this very long arm.

Installation

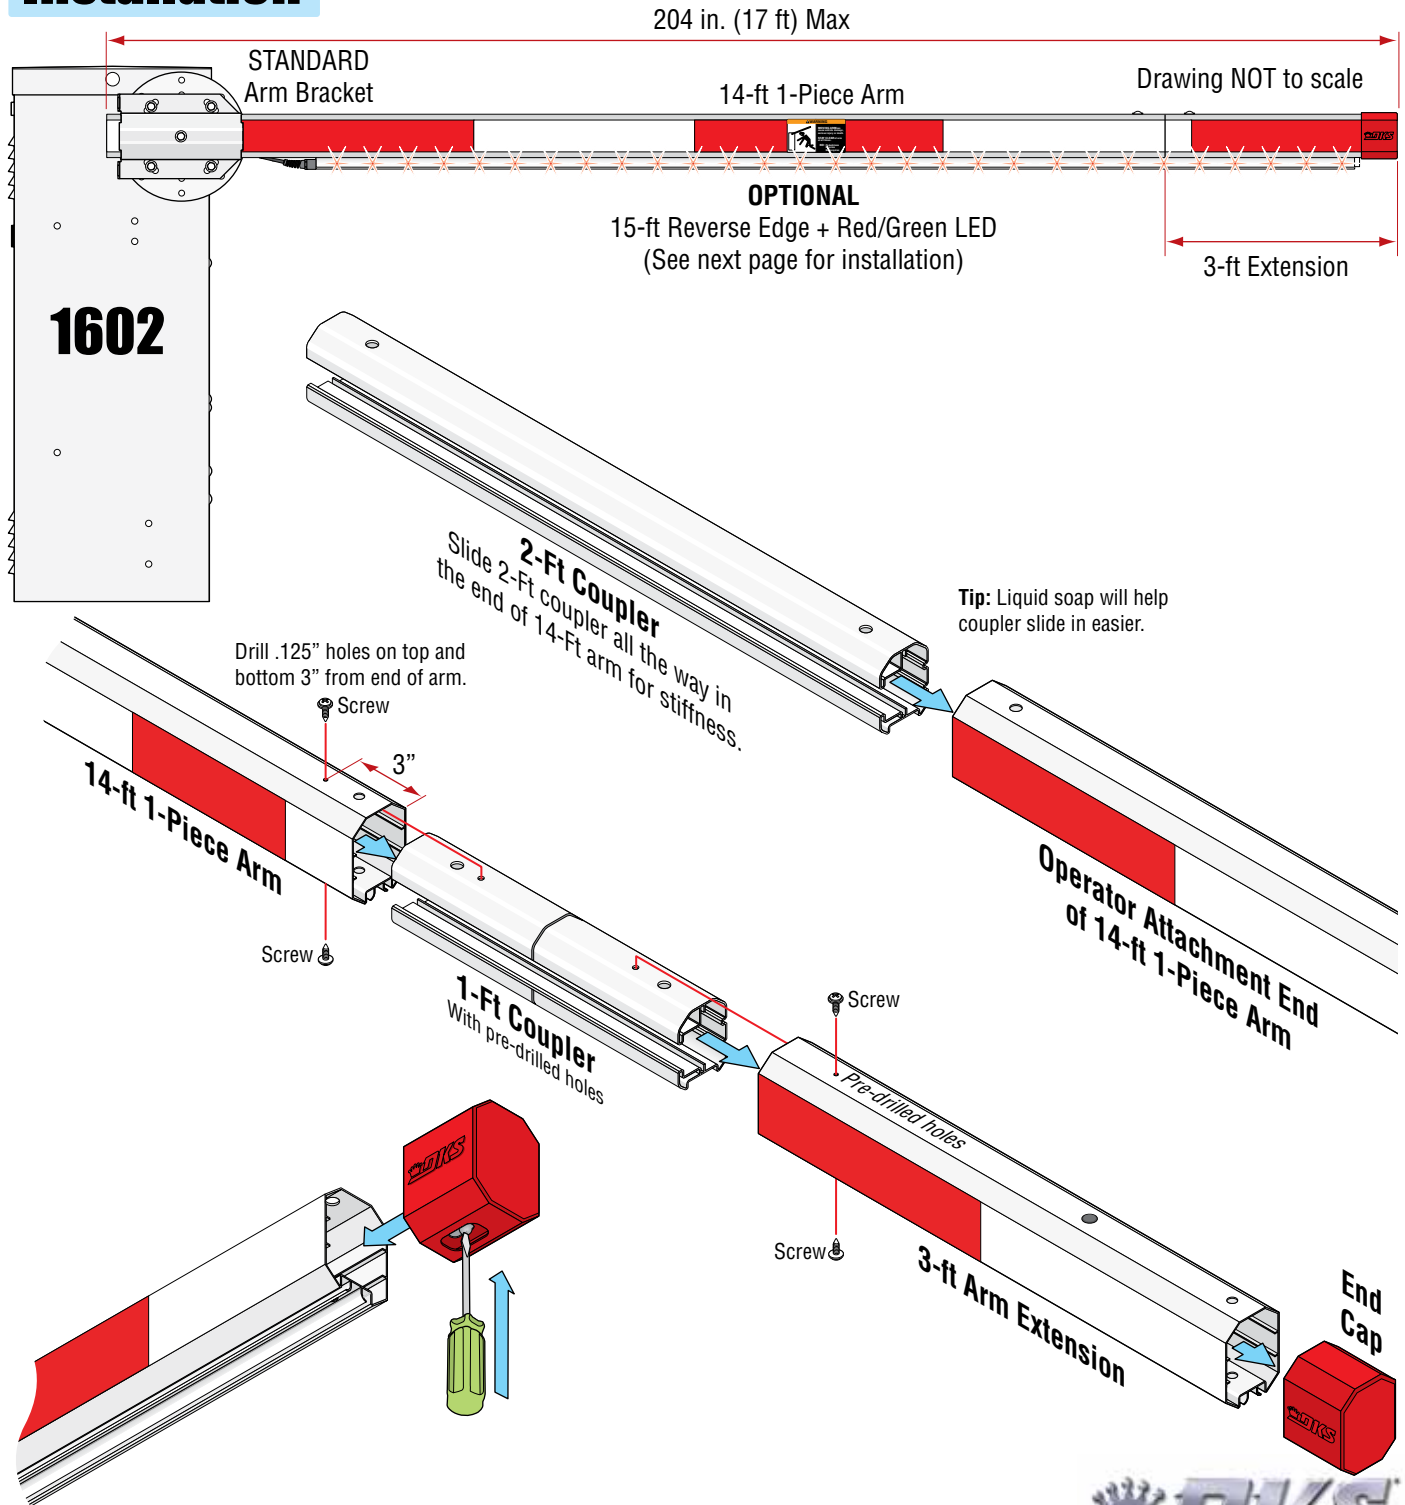

Install End Cap

Push a screwdriver through the hole in cap to release spring **while** pushing cap on. Keep pushing cap on until a "**CLICK**" is heard, locking it in place.

1601-805-E-2-26

Copyright 2026 DoorKing®, Inc. All rights reserved.

DOOR KING
120 S. Glasgow Avenue
Inglewood, California 90301 U.S.A.

Installation of 15-Ft Reverse Edge

DoorKing Part Number:

8080-915

15-ft Reverse Edge + Red/Green LED
(Sold Separately)

This edge will **ONLY** fit on a 14-ft octagon arm with the 3-ft extension installed on it.

Note: DO NOT operate arm with a malfunctioning reverse edge.

Installation


Drawings NOT to scale

2 Slide on Stopper

Loosen set screws.

1 Remove End Cap

Push a screwdriver through hole in bottom of end cap to release spring **while** pulling cap off.

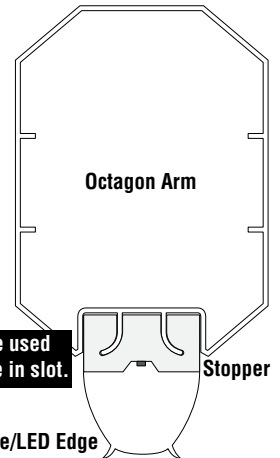

**Stopper MUST be used
or edge will slide in slot.**

Reverse/LED Edge

Reverse/LED Edge

Cover

— Push stopper against reverse edge and tighten it so edge does **NOT** slide in slot.

3 Slide on Edge

Tip: Liquid soap will help reverse edge slide on easier.

Tighten set screws.

Stopper MUST be used or edge will slide in slot.

Plug connects to the
8080-356 wire harness
(sold separately).
see 1601-268 manual.