



9210 VEHICULAR SLIDE GATE OPERATOR



• INDUSTRIAL • MAXIMUM SECURITY

- Advanced Microprocessor Control Board features Programming Switches to set the mode of operation required and includes Built-In Diagnostics
- Special Anti-Tailgating and Partial Open features help to reduce unauthorized vehicle access
- Selectable Loop Function (stop or reverse), and ports for plug-in Loop Detectors simplify wiring and make installation easy
- Direct Driven Limit Switches for precise gate control
- 5-Year Limited Warranty




partial open
open gate short distance for cars
or open fully for trucks



gate tracker
reporting output




limit switches
direct driven and easily adjustable

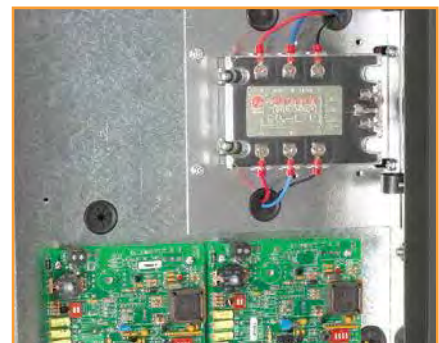

solid state motor control
no relay contacts to wear out or burn

9210 VEHICULAR SLIDE GATE OPERATOR

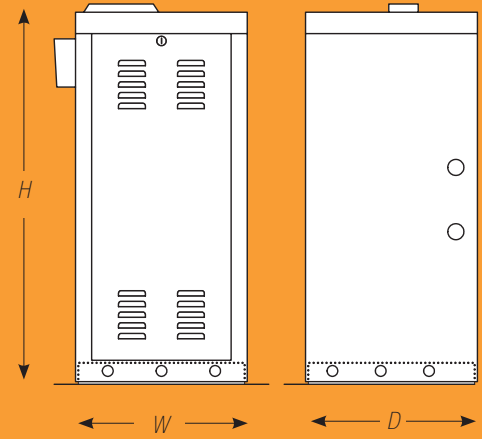

9210 1 HP

16" W x 35.5" H x 16" D (40.6cm W x 90.17cm H x 40.6cm D)

Optional Pedestal: 31.5" W x 12" H x 16.5" D (80cm W x 30.5cm H x 41.9cm D)

| | CLASS OF OPERATION | MAX GATE LENGTH * | MIN GATE LENGTH | MAX GATE WEIGHT * | MOTOR | INPUT 1-PHASE | INPUT 3-PHASE |
|-------------|--------------------|--------------------|-------------------|---|-------------------------------------|--|--|
| 9210 | III, IV | 100 ft (30.4 m) | 10 ft (3.05 m) | 3000 lb (1360 kg) with #60 chain 2000 lb (907 kg) with #50 chain | 1 HP Continuous Duty AC Motor | 115 VAC, 9.7A 208 VAC / 1Ø, 5.0A 230 VAC / 1Ø, 4.96A | 208 VAC / 3Ø, 3.4A 230 VAC / 3Ø, 3.3A 460 VAC / 3Ø, 1.7A |

* Assumes gate is on level ground, in good condition with properly adjusted hardware. Other external factors may affect the performance of the Gate Operator.

Technical Features

Mechanical

Primary reduction is provided by a 40:1 gear running in a continuous oil bath

Operator is shipped with Chain Brackets, Hardware and 20 ft of #50 or #60 Chain

Fixed Speed is approximately 10-12 inches/sec.

Housing is G90 Galvanized Steel painted charcoal grey with stainless steel Access Door

Options

Heavy-Duty Mounting Pedestal is recommended for gates weighing over 1500 lb and is required if Chain Tray is used

Chain Tray Kit (p/n 2601-270) is available in 10 ft lengths and is recommended on gates exceeding 20 ft in length

Red / Green Traffic Signal provides a visual indication when the gate is safe & it is OK for traffic to proceed

Electrical

Fail-Secure Operator. Electrical Interlock prevents gate from starting during manual operation

Adjustable Partial Open Limit

Selectable Stop / Reverse Loop Function

Anti-Tailgating Feature

Solid-State Motor Relays

Power Boost Start Circuit

Direct Driven Limit Switches for precise gate control

Built-In Power and Reset Switches

Two 115 VAC Convenience Outlets

Ports for plug-in Open and Reverse Loop Detectors (DKS Loop Detectors only)

Optional Gate Tracker reporting provides operator data to a companion DKS Access Control System (models 1833, 1835, 1837 and 1838)

Miscellaneous

Environmental: 10°F to 140°F (-12°C to 62°C)

Thermostatically Controlled Heater Kit recommended for colder environments

Shipping weight approximately 225 lb (102 kg) Depending on model and options selected



Safety

This Vehicular Slide Gate Operator is designed for Class III and IV applications only and should never be used in applications serving the general public such as apartment complexes, gated communities, residential applications, parking garages, etc.

Operator requires Type B1 or Type B2 entrapment protection devices with 10K resistive termination, otherwise the Operator will not function



Access Control Solutions since 1948

Distributed by:

MEMBER:



DOORKING® INC.

120 Glasgow Avenue, Inglewood, California 90301 U.S.A.

Tel: 310-645-0023 FAX: 310-641-1586 www.doorking.com

© 2018 All Rights Reserved. Product specifications may change without notice. Rev. 4/18